


The image shows a close-up, angled view of three different types of insulated metal panels. The top panel is teal with a ribbed surface. The middle panel is white with a ribbed surface. The bottom panel is dark red with a ribbed surface. A white semi-transparent banner is overlaid across the middle of the image, containing the text "pannelli coibentati" in red. The panels are shown in a way that suggests they are being compared or displayed together.

pannelli coibentati


PANNELLI COIBENTATI PARETE

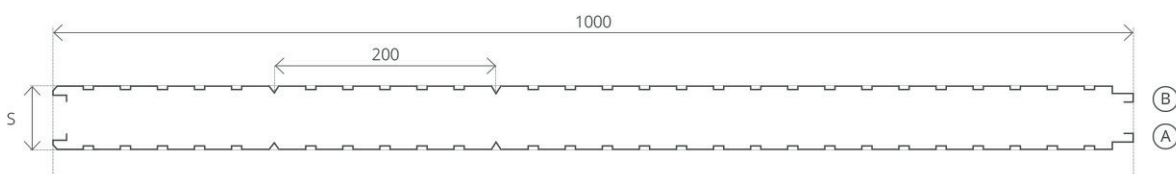


| Coefficiente di dispersione termica | | |
|-------------------------------------|---------------------------|----------------------|
| spessore pannello | trasmissione EN UNI 14509 | trasmissione (8 gg)* |
| mm | $U = W/m^2K$ | $U = W/m^2K$ |
| 25 | 0,82 | 0,75 |
| 30 | 0,70 | 0,64 |
| 35 | 0,61 | 0,55 |
| 40 | 0,53 | 0,49 |
| 50 | 0,43 | 0,39 |
| 60 | 0,36 | 0,33 |
| 80 | 0,28 | 0,25 |
| 100 | 0,22 | 0,20 |
| 120 | 0,18 | 0,16 |
| 140 | 0,16 | 0,14 |
| 150 | 0,15 | 0,13 |
| 160 | 0,14 | 0,12 |

Calcoli effettuati su pannello con paramenti acciaio 0,4 + 0,4 mm.

* a 8 giorni da produzione.

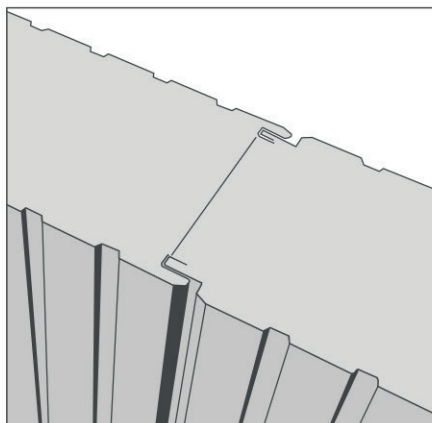


PANNELLI COIBENTATI COPERTURA

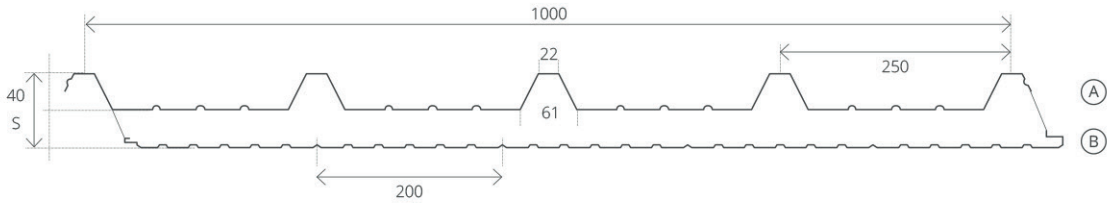

| Coefficiente di dispersione termica | | |
|-------------------------------------|---------------------------|----------------------|
| spessore pannello | trasmissione EN UNI 14509 | trasmissione (8 gg)* |
| mm | $U = W/m^2K$ | $U = W/m^2K$ |
| 30 | 0,69 | 0,64 |
| 40 | 0,53 | 0,49 |
| 50 | 0,43 | 0,39 |
| 60 | 0,36 | 0,33 |
| 80 | 0,27 | 0,25 |
| 100 | 0,22 | 0,20 |
| 120 | 0,18 | 0,17 |
| 140 | 0,15 | 0,13 |

Calcoli effettuati su pannello con paramenti acciaio 0,4 + 0,4 mm.

* a 8 giorni da produzione.

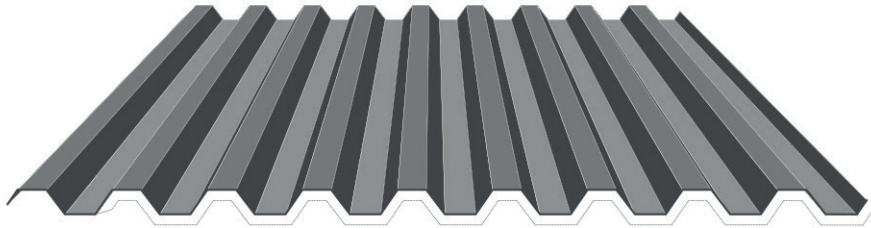

H 28 versione acciaio

| Carico massimo uniformemente distribuito (daN/m ²) freccia ≤ 1/200 L | | | | | | | | | |
|--|---------------------------------------|------|------|------|------|------|------|------|------|
| supporti (mm) | distanza tra gli appoggi «L» in metri | | | | | | | | |
| | 1,00 | 1,25 | 1,50 | 1,75 | 2,00 | 2,25 | 2,50 | 2,75 | 3,00 |
| 0,5 | 1011 | 517 | 300 | 189 | 126 | 89 | 64 | 49 | 37 |
| 0,6 | 1214 | 621 | 359 | 226 | 151 | 106 | 77 | 58 | 45 |
| 0,7 | 1418 | 725 | 419 | 264 | 177 | 124 | 91 | 68 | 52 |
| 0,8 | 1620 | 829 | 480 | 301 | 202 | 142 | 103 | 77 | 59 |
| 1,0 | 2026 | 1037 | 600 | 378 | 252 | 177 | 129 | 97 | 74 |

ACCESSORI PER MONTAGGIO